



FRONT VIEW, DOUBLE


6.50 [165.1]

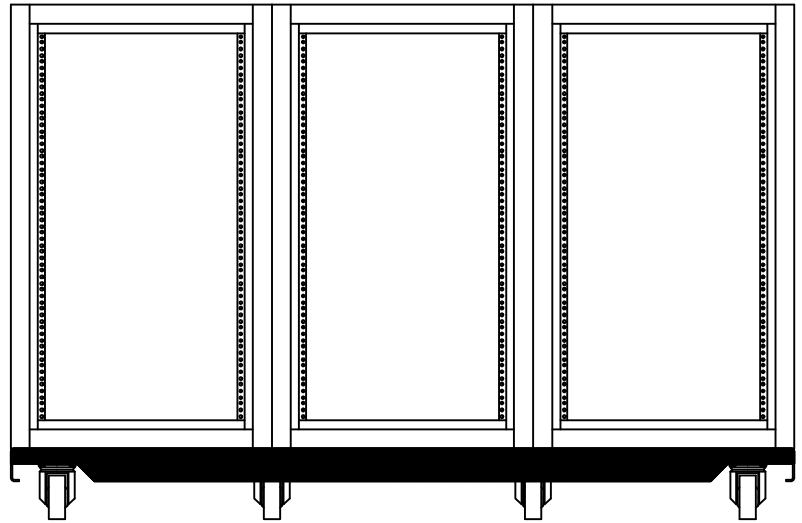

FRONT VIEW, TRIPLE

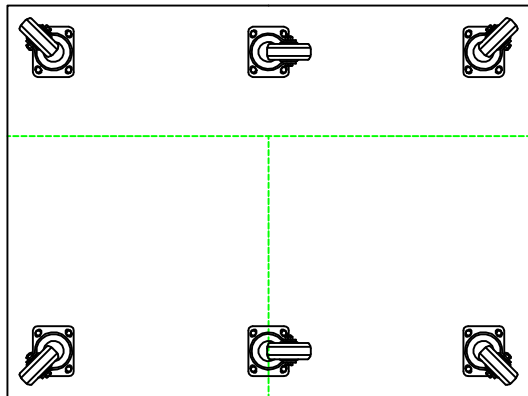

BOTTOM VIEW, DOUBLE

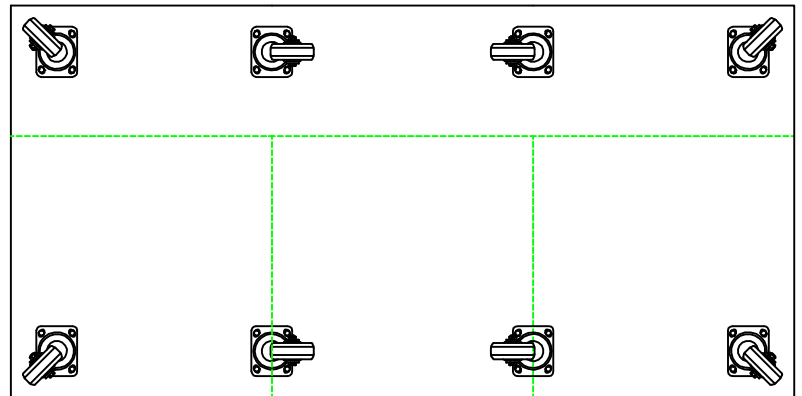

BOTTOM VIEW, TRIPLE

EXTENDED CASTER DOLLY  
DOUBLE WIDTH

FRAME DEPTH	PART NUMBER	A	B	C	D	E
24 1/16 [611.2]	082-020-010	48.06 [1220.8]	36.00 [914.4]	12.56 [319.1]	5.00 [127.0]	22.78 [578.6]
	082-050-010	58.06 [1474.8]	36.00 [914.4]	12.56 [319.1]	5.00 [127.0]	22.78 [578.6]
29 1/16 [738.2]	082-030-010	48.06 [1220.8]	45.00 [1143.0]	17.56 [446.1]	7.00 [177.8]	27.78 [705.6]
	082-060-010	58.06 [1474.8]	45.00 [1143.0]	17.56 [446.1]	7.00 [177.8]	27.78 [705.6]
36 1/16 [916.0]	082-036-010	48.06 [1220.8]	52.00 [1320.8]	24.56 [623.9]	----	34.78 [883.4]
	082-066-010	58.06 [1474.8]	52.00 [1320.8]	24.56 [623.9]	----	34.78 [883.4]

EXTENDED CASTER DOLLY  
TRIPLE WIDTH

FRAME DEPTH	PART NUMBER	A	B	C	D	E
24 1/16 [611.2]	083-020-010	72.12 [1832.0]	36.00 [914.4]	12.56 [319.1]	5.00 [127.0]	22.78 [578.6]
	083-050-010	87.12 [2213.0]	36.00 [914.4]	12.56 [319.1]	5.00 [127.0]	22.78 [578.6]
29 1/16 [738.2]	083-030-010	72.12 [1832.0]	45.00 [1143.0]	17.56 [446.1]	7.00 [177.8]	27.78 [705.6]
	083-060-010	87.12 [2213.0]	45.00 [1143.0]	17.56 [446.1]	7.00 [177.8]	27.78 [705.6]
36 1/16 [916.0]	083-036-010	72.12 [1832.0]	52.00 [1320.8]	24.56 [623.9]	----	34.78 [883.4]
	083-066-010	87.12 [2213.0]	52.00 [1320.8]	24.56 [623.9]	----	34.78 [883.4]

DIMENSIONS SHOWN  
INCHES [MILLIMETER]

TOLERANCES EXCEPT  
AS SHOWN .XXX ±.015 [.40]  
.XX ±.030 [.79]

NOTE: SEE PAGE 50 FOR TYPICAL DETAILS  
REFER TO PAGE 50 FOR TYPICAL CASTER MOUNTING

THE INVENTION, DESIGN, DETAIL AND TECHNICAL DATA SHOWN IN THIS REPRODUCTION OF ONE OF OUR PROPRIETARY ENGINEERING DRAWINGS IS THE PROPERTY OF EQUIPTO ELECTRONICS CORPORATION AND MUST BE USED SOLELY IN CONSIDERING THE PURCHASE FROM EQUIPTO ELECTRONICS CORPORATION OF THE EQUIPMENT OR MATERIAL DESCRIBED. ALL RIGHTS IN RESPECT THERETO ARE, THRU THIS DECLARATION, EXPRESSLY RESERVED, SPECIFICALLY PRECLUDING THE COPYING IN WHOLE OR PART WITHOUT OUR WRITTEN CONSENT.

EQUIPTO ENCLOSURE SYSTEMS

EXTENDED CASTER DOLLY  
FOR USE WITH 24 1/16" [611.2], 29 1/16" [738.2] &  
36 1/16" [916.0] FRAME DEPTHS (DOUBLE & TRIPLE WIDTH)